

# Kubota



## KUBOTA DIESEL TRACTOR



# L3200

## L-Series Standard Tractor

Loaded with upgrades, the new L3200 is ideal for everything from small chores to commercial landscaping.





## **KUBOTA DIESEL TRACTOR**

# **L3200**

**The new Kubota L-Series standard tractors are now equipped with numerous upgraded features.**


For over 10 years, the Kubota L-Series basic tractors have been some of the most popular compact tractors on earth. But now, with a host of impressive upgrades, our new generation L3200 standard tractors are anything but basic. Making the L3200 more adept at handling anything you throw their way is a spacious, uncluttered deck; a sleek, modern, one-piece hood design; a more powerful engine; a versatile shuttle transmission; a large capacity fuel tank; a highly functional front loader; and more. So from landscaping to agricultural to any application in between, the Kubota L3200 standard tractors offer a world of higher performance.



# Our new generation L3200 delivers new world of performance.

## **More powerful engines to let you handle the toughest projects.**

To elevate your performance to a new level, we increased the horsepower on our world-renowned E-TVCS diesel engine. The L3200 puts out an impressive 33.4 horsepower. And, like its predecessors, it delivers a dynamic output and high torque, plus produces cleaner emissions with low noise and vibration. Best of all, its engine provides the highest level of reliability.

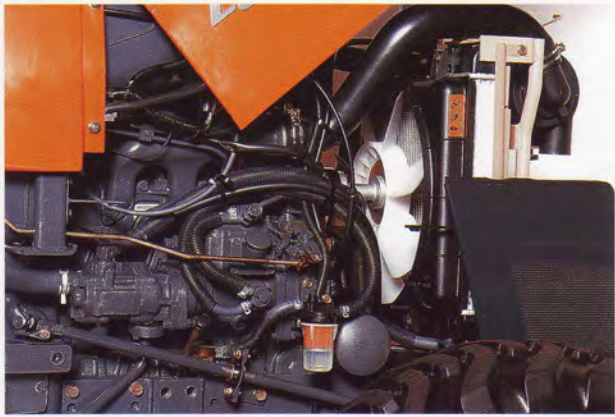

## **Large capacity fuel tank**

*You'll spend more time working and less time refuelling with our bigger fuel tank.*




## **Full-open bonnet and slide-out grill**

*Whether simple maintenance or a more involved repair, a newly designed, one-piece, full-opening bonnet exposes most engine components—making it faster and easier to do either.*



## **Bevel gear 4WD**

*A superior feature that delivers an extremely tight turning radius with full power transfer to the wheels at every steering angle.*

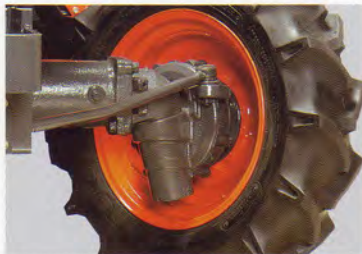

## **Reliable transmission for a smoother performance.**

Get the job done faster with more horsepower and a mechanical shuttle transmission. For easier front-loader operation, the range shift has a forward/reverse mechanical shuttle shift in the low and reverse ranges. Moreover, the transmission offers 8 forward and 4 reverse speeds (8F/4R), enabling you to select the perfect speed for higher productivity.



Range shift lever



Main shift lever

# a whole

## **Power steering**

To reduce fatigue, this 4-wheel drive vehicle comes equipped with smooth, easy-turn power steering.

## **Choice of tyres**

Tyres designed especially for specific jobs enable the L3200 to perform even better. Select from AG and Turf.



## **Wet disc brakes**

Responsive and smooth, our long-life wet disc brakes are immersed in oil and require only the slightest foot pressure to activate.

## **Live, continuous-running PTO**

To increase rear-cutter performance, the L3200 standard tractor is equipped with a live, continuous-running, rear PTO—which continues to run even when the tractor is stopped.

## **The new performance matched front loader.**

Our new front loader offers increased lift capacity and higher lift height. Bucket dump speeds are amazingly fast—in fact, they're unmatched when compared to the competitors. A single-lever joystick provides easy and efficient operation of the front loader. The quick attach and detach system saves time by allowing you to do either, in just minutes and without tools.



<b>Model</b>	LA463
<b>Matching Tractor</b>	L3200
<b>Maximum Lift Height (Pivot Pin)</b>	2420 mm (96.8 in.)
<b>Clearance w/Attachment Dump</b>	1935 mm (77.4 in.)
<b>Reach @ Maximum Height</b>	565 mm (22.6 in.)
<b>Maximum Dump Angle</b>	40 degrees
<b>Digging Depth</b>	150 mm (6.0 in.)
<b>Lift Capacity (Bucket Centre)</b>	460 kg (1012 lbs.)

**More comfort. More style.  
More power. More of what the  
most popular compact tractor  
on earth should provide.**

When you're more comfortable, you're more productive. With this in mind, we designed the new generation Kubota L3200 standard tractors to be the perfect balance of form and function. The streamlined hood and enclosed muffler give them a sleek and modern look, and the design provides better visibility as well. Other practical features include a spacious semi-flat deck and conveniently located control levers.



**Spacious semi-flat deck**

*To provide maximum comfort, the operator's platform has been redesigned. Compared to previous models, the platform space has been increased by a generous 12%. Its semi-flat design also makes getting on the L3200 easier.*

**Enclosed muffler**

*For a totally unobstructed view, which greatly enhances front-loader operation, the muffler is concealed under the hood.*

**Quick access range shift lever**

*For quicker access and easier mounting/dismounting, the range shift lever has been repositioned.*

**Conveniently located PTO lever**

*The repositioned PTO lever means quicker access and easier mounting/dismounting.*



# Specifications

<b>Model</b>	<b>L3200 (Rear foldable ROPS model)</b>		
	DT (4WD)		
<b>Engine</b>	D1703-MA-E2A		
Model	D1703-MA-E2A		
Type (Make : Kubota)	Vertical liquid-cooled 4-cycle diesel, Indirect injection (E-TVCS)		
Engine gross power*	kW (PS)	24.6 (33.4)@2500 rpm	
PTO power*	kW (PS)	21.3 (29.0)@2500 rpm	
No. of cylinders	3		
Bore & stroke	mm	87×92.4	
Total displacement	cm <sup>3</sup>	1647	
Battery	12V.RC : 123min, CCA : 490A		
Fuel tank capacity	ℓ	34	
<b>PTO</b>	Live-continuous running		
Rear PTO (540 rpm)	Live-continuous running		
<b>Hydraulic</b>	22.2		
Pump capacity (main)	ℓ/min.	22.2	
(PS)	ℓ/min.	13.5	
3-point hitch	Category I		
Lift control type	Position control		
Max. lift force At lift point	kg	906	
At 610mm behind lift point	kg	651	
<b>Travelling system</b>	Sliding gear & constant mesh 8F/4R		
Transmission	Sliding gear & constant mesh 8F/4R		
Steering	Integral power steering		
Brakes	Mechanical wet disk type		
Clutch	Dry-type dual stage		
Rear differential lock	Standard		
<b>Tyre size</b>	AG Standard	Front / Rear	7-16 R1 / 11.2-24 R1
	AG Option	Front / Rear	7.5L-15 / 320/70R24
	TURF Option	Front / Rear	212/80-D15 / 355/80-D20
<b>Travelling speeds w/standard AG tyres</b>	Forward		Reverse
At rated engine speed	km/h	1.6-19.7	2.2-7.1
Maximum speed	km/h	Forward 21.3	
<b>Dimensions &amp; weight</b>	2810		
Overall length (w/o 3P)	mm	2810	
Overall width (min. tread)	mm	1290	
Overall height (w/ ROPS)	mm	2460	
Wheelbase	mm	1610	
Min. ground clearance (Front axle)	mm	345	
Tread Front	mm	1085	
(STD Tyres) Rear	mm	1015, 1115, 1195, 1295	
Min. turning radius (w/ brake)	m	2.5	
Weight (w/ ROPS)	kg	1210	
<b>Optional equipment</b>	Front bumper weights, Aux. control valve		

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty information.

For your safety, KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

\* Manufacturer's estimate

©2006 Kubota Corporation



## KUBOTA Corporation

Head Office: 2-47, Shikitsuhigashi 1-chome, Naniwa-ku, Osaka, Japan

Fax (06) 6648-3521

Tokyo Office: 1-3, Nihonbashi-Muromachi 3-chome, Chuo-ku, Tokyo, Japan