


# Kubota

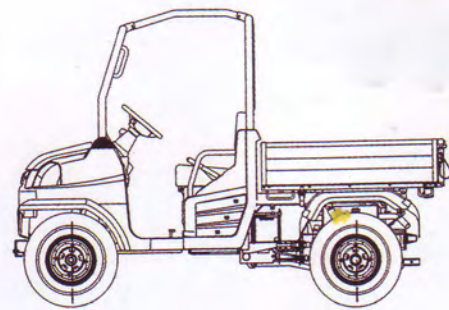

KUBOTA UTILITY VEHICLE

# RTV

## RTV900

**Rugged. Powerful. Reliable.** The Kubota team has developed the RTV900 to be the hardest working utility on the planet.



**The RTV900 is a tough utility vehicle that's built from the ground up by Kubota engineers - the people who know how to make machines work harder and last longer. From the moment you grab the wheel, you'll notice the rugged, heavy duty design and performance that only a Kubota can offer.**



Model		General Purpose	
Engine	Make		KUBOTA D902-E-UV
	Type		3 cylinders, 4-cycle, diesel, QHV
	Displacement	cu.in. (cc)	54.8 (0.898)
	Horsepower	Hp (kw) /rpm	21.6 (16.1) @ 3200
Fuel tank capacity		U.S.Gal. (L)	7.4 (28)
Transmission			Variable hydro trasmission (VHT)
Max. travelling speed		mph (km/h)	25 (40)
Wheel, drive system			4, 4WD w/ 2WD selection
Differential lock			Standard, foot operated with mechanical holder
Gear selection			Hi, med, low range, neutral and reverse
Brakes	Front/Rear		Wet disc brakes
	Parking		Rear wheel, hand lever
Steering			Power assisted steering (Hydostatic power)
Suspension	Front		Independant, Mac-Pherson strut type
	Rear		Semi-independant, DeDion axel w/leaf springs and shock absorbers
Dimensions	Length	in. (mm)	117.3 (2990)
	Width	in. (mm)	59.3 (1520)
	Height, overall	in. (mm)	79.3 (2015)
	Front tread centers	in. (mm)	45.3 (1150)
	Rear tread centers	in. (mm)	46.6 (1180)
	Wheelbase	in. (mm)	77.4 (1965)
	Ground clearance		8.5 (215)
	front axel	in. (mm)	
	Ground clearance rear axel	in. (mm)	8.3 (210)
Turning radius	(m)		3.75
Max. rolling weight (Towing capability)		lbs (kg)	1300 (590)
Payload capacity		lbs (kg)	1630 (740)
Weight		lbs (kg)	1775 (805)
Cargo Bed	Width	in. (mm)	52 (1320)
	Length	in. (mm)	46.7 (1180)
	Depth	in. (mm)	11.4 (290)
	Volume	cu.ft (m <sup>3</sup> )	10 (0.455)
	Bed height (unloaded)	in. (mm)	31.5 (800)
	Cargo bed loaded	lbs (kg)	1102 (900)
Sound level, operator ear		db. (A)	87
Tyre options	ATV tyres (front) (rear)		n/a
	Knobby tyres (front) (rear)		25x10-12/ 25x10-12 Knobby 5 ply
	Turf tyres (front) (rear)		25x12-12/25x12-12 Turf 4 ply
	Heavy duty tyres (front) (rear)		25x10-12/25x10-12 HDWS, GPLY
Front gaurd			Optional
Body colour			Orange
Hydraulic lift bed			Optional
Auxiliary remote valve			Optional
Speedometer			Optional

The company reserves the right to change the above specification without notice.  
 This information is for descriptive purposes only. Please contact your local Kubota Dealer for warranty information  
 For you safety KUBOTA strongly recommends the use of a Rollover Protective System (ROPS) and seat belt in almost all applications  
 For completed operational information, the operators manual should be consulted. For off-highway use only.  
 The values in "Ground clearance" and "Weight" are those of the machines equipped with the tyres in the table above

