


Mower Conditioners Snyer - Kneusers



New Holland 1411 & 1431 Trailed Mower Conditioners New Holland 1411 & 1431 Sleeptipe Snyer - Kneusers

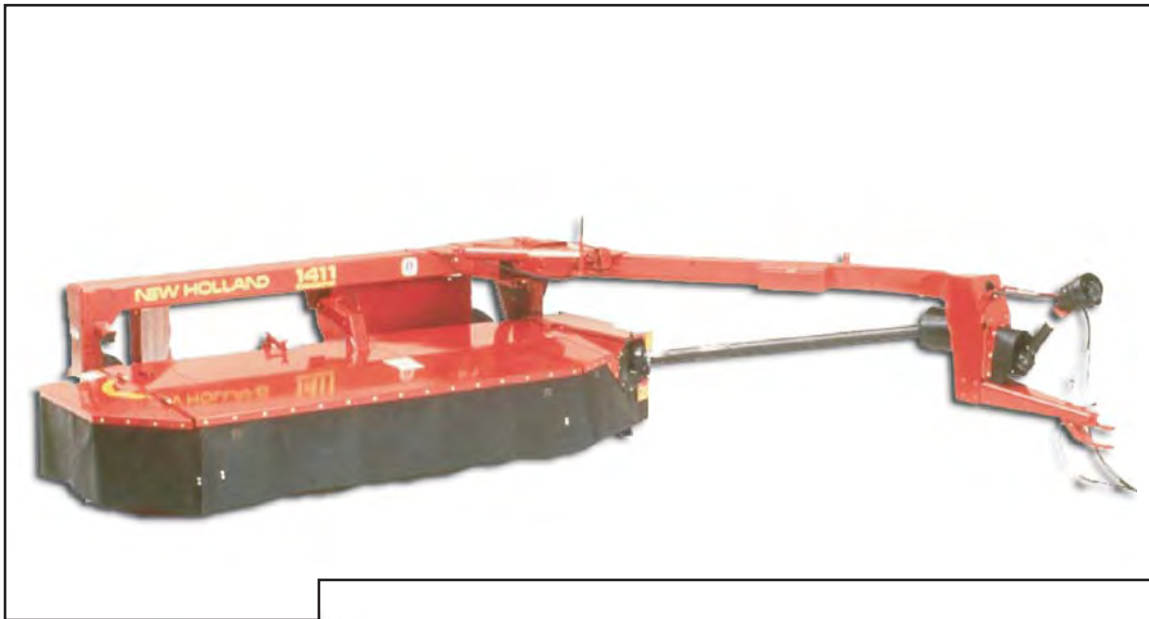

Modern • Dynamic • Innovative
Modern • Dinamies • Innoverend

SPECIFICATIONS NEW HOLLAND TRAILED MOWER CONDITIONERS
SPESIFIKASIES NEW HOLLAND SLEEP SNYERKNEUSERS

SPECIFICATIONS			SPESIFIKASIES
MODEL	1411	1431	MODEL
CUTTERBAR			SNYBALK
Number of cutting discs	8	10	Aantal snyskywe
Number of knives	16 - 2 per disc/skyf	20 - 2 per disc/skyf	Aantal messe
Disc speed (r/min)	3000		Skyfspoed (r/min)
Cutting width (m)	3,20	4	Snywydte (m)
Cutting angle and height	Standard - hydro control, from 2° (81,25mm) to 10°(31,25mm) / Standaard - hidro kontrole, vanaf 2°(81,25mm) tot 10°(31,25mm)		Snyhoek en hoogte
Ground clearance with header fully raised (mm)	457		Grondvryhoogte met snyeenheid ten volle opgelig (mm)
CONDITIONER			KNEUSER
Type	Chevron - design intermeshing moulded rubber rollers "Chevron" - ontwerp inkammende gegote rubber rollers		Tipe
Roller length (m)	2,591		Rollerlengte (m)
Roller diameter (mm)	264		Roller deursnee (mm)
Roller speed (r/min)	635	640	Rollerspoed (r/min)
MATERIAL DISCHARGE			MATERIAAL PLASING
Swath (m)	2,134	2,438	Oop gestrooi (m)
Windrow	Adjustable / Verstelbaar	Adjustable / Verstelbaar	Windry (m)
	0,914 - 2,134	0,914 - 2,438	
DRIVE			AANDRYWING
PTO speed (r/min)	540	1000	KA spoed (r/min)
Protection	Slip clutch / Glykoppelaar		Beveiliging
TRACTOR			TREKKER
PTO kilowatt required	60>	67>	KA kilowatt benodig
Hydraulics required	2 x Double action / 2 x Dubbelaksie		Hidroulika benodig
DIMENSIONS AND MASS			AFMETINGS EN MASSA
Width - transport (m)	3,43	4,00	Wydte - vervoer (m)
Width - work (m)	4,57	5,79	Wydte - werk (m)
Length (m)	5,35	7,93	Lengte (m)
Mass (kg)	1864	2557	Massa (kg)
TYRES			BANDE
Tyre size	11L x 15	31,5 x 13,5L x 15	Bandgrootte

PRINT 2000 (011) 893-3255