

K KONGSKILDE
PARAGRUBBER ECO




Paragrubber ECO

The Kongskilde Paragrubber ECO sub-soiler consists of a heavy-duty frame with 6 specially angled tines. The Paragrubber has a maximum working width of 3 m and a working depth of 50 cm. The depth is controlled by a rear crumpler type roller or double - cutter roller. The Paragrubber distinguishes itself by lifting and loosening the soil across the full working width.

Contrary to the ordinary sub-soilers, the Kongskilde Paragrubber ECO exploits the full working width when loosening the soil. In addition the design makes it easy to combine the sub-soiler with a rotavator, for example the Howard Rotavator, which means that it is possible to incorporate the stubble into the soil as well as subsoiling in one pass.

Technical Specifications

	Type	Working width	Recommended tractor power	Weight
	Paragrubber ECO 300	3.0 m	80 kW (110 hp)	780 kg
Accessoires				
	3-point linkage for PTO implement Cage roller 550 mm Cutter roller Long PTO shaft for Rotavator Support legs (only necessary when using the Paragrubber without roller)			
Remarks	The 3-point linkage for PTO implement can only be mounted when using the Paragrubber without roller. The Paragrubber is stone protected with shear bolt. This makes the Paragrubber most useful in soil with few fixed stones.			

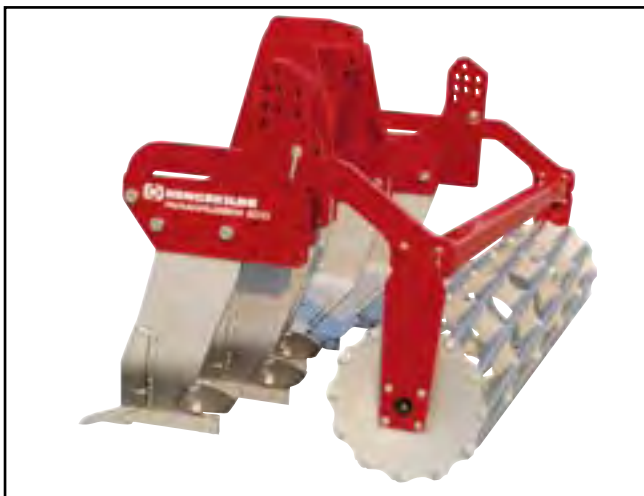

Kongskilde Paragrubber ECO 300 with Cage roller



Kongskilde Paragrubber ECO 300 with Cutter roller



Kongskilde Industries A/S
 Skælskørvej 64
 DK-4180 Sorø • Denmark
 Tel. + 45 57 86 50 00 • Fax. +45 57 86 51 00
 mail@kongskilde.com
 www.kongskilde.com