







Power Harrow HK 10

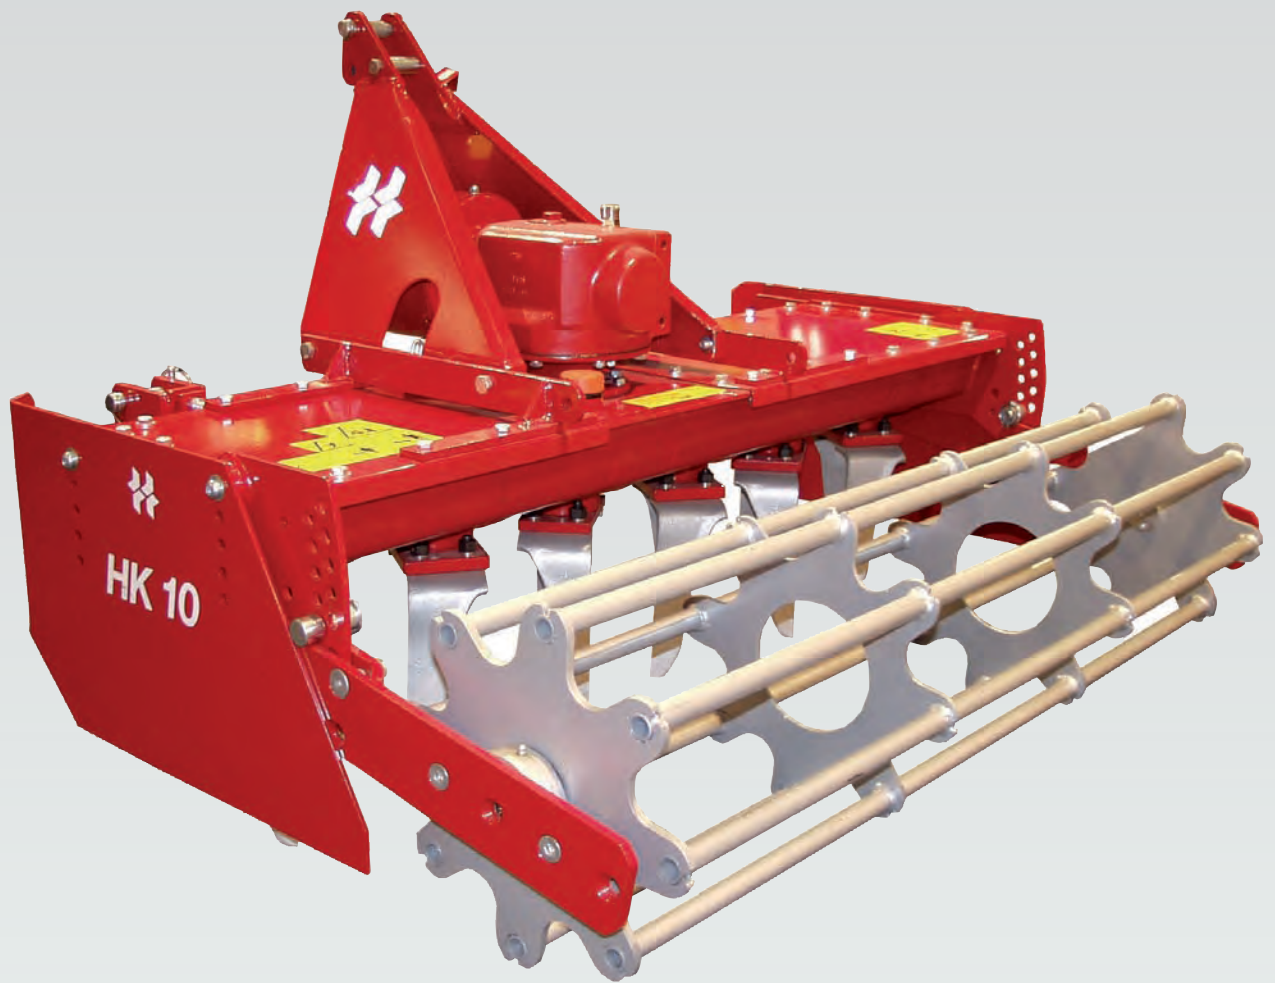

Howard Power Harrow HK 10

Light-weight power harrow for low HP tractors, aimed to meet the requirements of the private gardener and for horticultural farms, greenhouse cultivation, and market gardening.

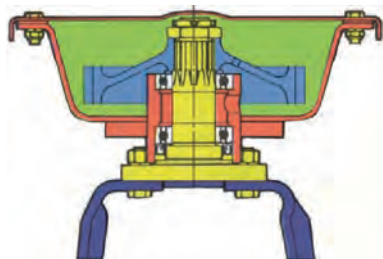

Rotor

Four rotors per meter working width combined with special designed blades ensure excellent working quality. The rotor shaft and blade carrier are made from a one piece, high quality forging.

Gearbox

The single speed gearbox allows 540 RPM and rotor speeds of 280/min.

Depth control

All Howard HK 10 models can be equipped with rear cage roller. The required working depth can easily be adjusted with a pin/hole construction.

Linkage

The fixation points for the lower linkage arms are easily adjusted to suit narrow tractors with Cat. I or Cat. II.

Side guards

The rigid side guards are easily adjustable in relation to size of blade and working depth.

Technical specifications

Standard equipment	Optional equipment
<ul style="list-style-type: none"> • Single speed transmission box 540/min • Rotor speed 280/min • Blades 250 x 10 mm • PTO shaft with shearbolt 	<ul style="list-style-type: none"> • Spring loaded side guards • Tooth Pacher Roller • Cage Roller

Type	Working width (m)	Transport width (m)	Power requirement (Hp)	Power requirement (kW)	Number of blades	Weight w/o cage roller (kg)	Weight with cage roller (kg)
HK10-100S	1.0	1.12	20-80	15-59	8	275	320
HK10-125S	1.25	1.36	22-80	16-59	10	300	360
HK10-150S	1.50	1.61	25-80	18-59	12	320	400
HK10-175S	1.75	1.85	27-80	20-59	14	345	440
HK10-200S	2.00	2.10	30-80	22-59	16	370	480
HK10-225S	2.25	2.35	35-80	26-59	18	390	520



Kongskilde UK Ltd.

Hempstead Road, Holt
Norfolk NR25 6EE
United Kingdom

Tel: +44 (0) 1263 713291
Fax: +44 (0) 1263 712922
mail@kuk.kongskilde.com
www.kongskilde.com